

DAGO

锻钢截止阀系列
**FORGED STEEL
GLOBE VALVES
SERIES**




内螺纹与承插焊截止阀
Female threaded and socket welded globe valves



Y型截止阀
Y type globe valves



自密封截止阀
Pressure sealing globe valves

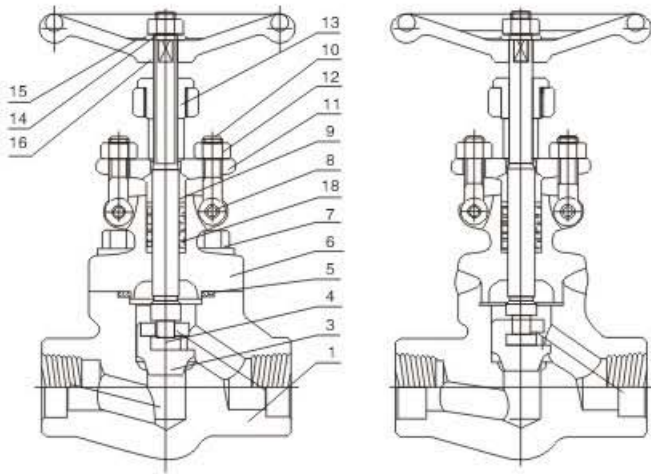

碳钢温压等级 Carbon steel temperature-pressure rate


CL150-285 P.S.I @ 100°F CL300-740 P.S.I @ 100°F
 CL 600-1480 P.S.I @ 100°F CL 800-1975 P.S.I @ 100°F
 CL 1500-3705 P.S.I @ 100°F

应用规范 Application standards

- 设计制造 Design and manufacture conform to BS5352, MSS SP-118;
- 连接端尺寸 Connection ends conform to:
 - 承插口尺寸按 Socket welded dimension conform to ANSI B16.11, JB/T1751
 - 螺纹端尺寸按 Screw ends dimension conform to ANSI B1.20.1, JB/T7306
 - 对焊端尺寸按 Butt-welded conform to ANSI B16.25, JB/T12224
 - 法兰端尺寸按 Flanged ends conform to ANSI B16.5, JB79
- 阀门检查和试验 Test and inspection conform to: API 598, GB/T13927, JB/T9092
- 结构特征 Structure features:
 - 螺栓连接阀盖 (B.B) 和明杆支架 (OS&Y)
Bolted bonnet, outside screw and yoke
 - 或焊接阀盖 (W.B) 和明杆支架 (OS&Y)
Welded bonnet, outside screw and yoke
- 材料按 Materials conform to ANSI/ASTM 的规定。
- 主体材料 Main materials: A105; LF2; F5; F11; F22; 304(L); 316(L); F347; F321; F51; Monel; 20 合金等 Alloy.

典型零件材料表 Main part materials list

序号 NO.	零件名称 Part name	A105/F6a	A105/F6aHFS	LF2/304	F11/F6aHF	F304(L)/304(L)	F316(L)/316(L)	F51/F51
1	阀体 Body	A105	A105+HF	LF2	F11+HF	F304(L)	F316(L)	F51
3	阀瓣 Disc	F6a	F6a	F304	F6aHF	F304(L)	F316(L)	F51
4	阀杆 Stem	410	410	304	410	304(L)	316(L)	F51
5	垫片 Gasket	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	316+柔性石墨 Flexible graphite	316+柔性石墨 Flexible graphite
6	阀盖 Bonnet	A105	A105	LF2	F11	F304(L)	F316(L)	F51
7	螺栓 Bolt	B7	B7	L7	B16	B8(M)	B8(M)	B8(M)
8	销 Pin	410	410	410	410	304	304	304
9	填料压套 Gland	410	410	304	410	304	316	F51
10	活节螺栓 Gland eyebolt	B7	B7	L7	B16	B8(M)	B8(M)	B8(M)
11	填料压盖 Gland flange	A105	A105	LF2	F11	F304	F304	F304
12	六角螺母 Hex nut	2H	2H	2H	2H	8(M)	8(M)	8M
13	阀杆螺母 Stem nut	410	410	410	410	410	410	410
14	锁紧螺母 Locking nut	35	35	35	35	35	35	35
15	铭牌 Nameplate	AL	AL	AL	AL	AL	AL	AL
16	手轮 Handwheel	A197	A197	A197	A197	A197	A197	A197
18	填料 Packing	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite

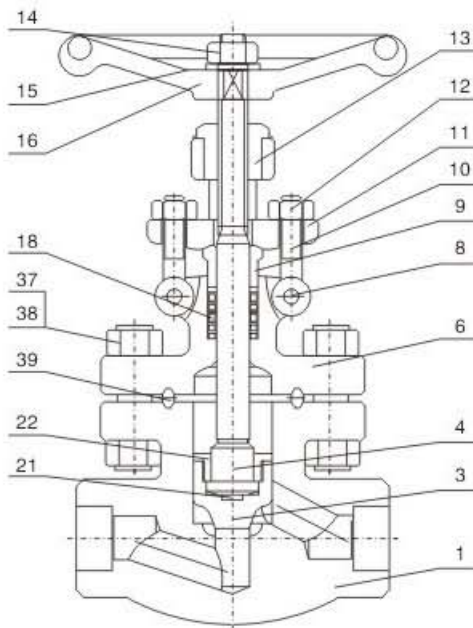

应用规范 Application standards


- 设计制造 Design and manufacture conform to: MSS SP-118;
- 连接端尺寸 Connection ends conform to:
 - 承插口尺寸按 Socket welded dimension conform to ANSI B16.11, JB/T1751
 - 螺纹端尺寸按 Screw ends dimension conform to ANSI B1.20.1, JB/T7306
 - 对接端尺寸按 Butt-welded conform to ANSI B16.25, ANSI B16.25, JB/T12224
 - 法兰端尺寸按 Flanged ends conform to ANSI B16.5, JB79
- 阀门检查和试验 Test and inspection conform to: API 598, GB/T13927, JB/T9092
- 结构特征 Structure features:
 - 螺栓连接阀盖(B.B)和明杆支架(OS&Y)
Bolted bonnet, outside screw and yoke
 - 或焊接阀盖(W.B)和明杆支架(OS&Y)
Welded bonnet, outside screw and yoke
- 材料按 Materials conform to ANSI/ASTM的规定。
- 主体材料 Main materials: A105; LF2; F5; F11; F22; 304(L); 316(L); F347; F321; F51; Monel; 20合金等 Alloy.

碳钢温压等级 Carbon steel temperature-pressure rate

CL150-285 P.S.I @ 100°F CL300-740 P.S.I @ 100°F CL 600-1480 P.S.I @ 100°F
CL 800-1975 P.S.I @ 100°F CL 1500-3705 P.S.I @ 100°F

典型零件材料表 Main part materials list

序号 NO.	零件名称 Part name	A105/F6a	A105/F6aHFS	LF2/304	F11/F6aHF	F304(L)/304(L)	F316(L)/316(L)	F51/F51
1	阀体 Body	A105	A105+HF	LF2	F11+HF	F304(L)	F316(L)	F51
3	闸瓣 Disc	F6a	F6a	F304	F6aHF	F304(L)	F316(L)	F51
4	阀杆 Stem	410	410	304	410	304(L)	316(L)	F51
6	阀盖 Bonnet	A105	A105	LF2	F11	F304(L)	F316(L)	F51
8	销 Pin	410	410	410	410	304	304	304
9	填料压套 Gland	410	410	304	410	304	316	F51
10	活节螺栓 Gland eyebolt	B7	B7	L7	B16	B8(M)	B8(M)	B8M
11	填料压盖 Gland flange	A105	A105	LF2	F11	F304	F304	F304
12	六角螺母 Hex nut	2H	2H	2H	2H	8(M)	8(M)	8M
13	阀杆螺母 Stem nut	410	410	410	410	410	410	410
14	锁紧螺母 Locking nut	35	35	35	35	35	35	35
15	铭牌 Nameplate	AL	AL	AL	AL	AL	AL	AL
16	手轮 Handwheel	A197	A197	A197	A197	A197	A197	A197
18	填料 Packing	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite
21	阀杆垫块 Stem pad	420	420	420	420	316SH	316SH	316SH
22	阀瓣螺母 Disc nut	410	410	410	410	410	410	410
37	双头螺栓 Screwed stud	B7	B7	L7	B16	B8(M)	B8(M)	B8(M)
38	螺母 Nut	2H	2H	8	8	8(M)	8(M)	8(M)
39	金属环 Metal ring	304	304	304	304	316(L)	316(L)	F51

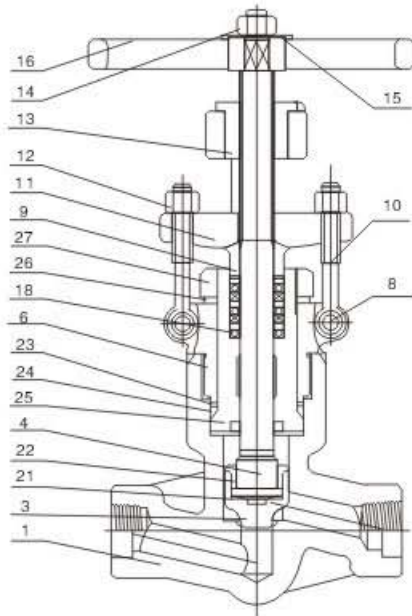

碳钢温压等级 Carbon steel temperature-pressure rate


CL 1500-3705 PSI @ 100°F CL 2500-6170 PSI @ 100°F

应用规范 Application standards

1. 设计制造 Design and manufacture conform to: MSS SP-118;
2. 连接端尺寸 Connection ends conform to:
 - 1) 承插口尺寸按 Socket welded dimension conform to ANSI B16.11, JB/T1751
 - 2) 螺纹端尺寸按 Screw ends dimension conform to ANSI B1.201, JB/T7306
 - 3) 对焊端尺寸按 Butt-welded conform to ANSI B16.25, JB/T12224
 - 4) 法兰端尺寸按 Flanged ends conform to ANSI B16.5, JB79
3. 阀门检查和试验 Test and inspection conform to: API 598, GB/T13927, JB/T9092
4. 结构特征 Structure features:
 - 螺栓连接阀盖自紧式密封 A threaded and pressure seal bonnet;
 - Y型或T型结构 Y type and T type
5. 材料按 Materials conform to ANSI/ASTM的规定。
6. 主体材料 Main materials: A105; LF2; F5; F11; F22; 304(L); 316(L); F347; F321; F51; Monel; 20合金等 Alloy.


典型零件材料表 Main part materials list

序号 NO.	零件名称 Part name	A 105/F6a	A105 /F6a HFS	LF2/304	F11/F6aHF	F304(L)/304(L)	F316(L)/316(L)	F91/410HF
1	阀体 Body	A105	A105+HF	LF2	F11+HF	F304(L)	F316(L)	F91+HF
3	阀瓣 Disc	410	410	304	410	304(L)	316(L)	410+HF
4	阀杆 Stem	410	410	304	410	304(L)	316(L)	410
6	阀盖 Bonnet	A105	A105	LF2	F11	F304(L)	F316(L)	F91
8	销 Pin	410	410	410	410	304	304	410
9	填料压套 Gland	410	410	304	410	304	316	410
10	活节螺栓 Gland eyebolt	B7	B7	L7	B16	B8(M)	B8(M)	B8
11	填料压盖 Gland flange	A105	A105	LF2	F11	F304	F304	F91
12	六角螺母 Hex nut	2H	2H	2H	2H	8(M)	8(M)	8
13	阀杆螺母 Stem nut	410	410	410	410	410	410	410
14	锁紧螺母 Locking nut	35	35	35	35	35	35	35
15	铭牌 Nameplate	AL	AL	AL	AL	AL	AL	AL
16	手轮 Handwheel	A197	A197	A197	A197	A197	A197	A197
18	填料 Packing	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite
21	阀杆垫块 Stem pad	420	420	420	420	316SH	316SH	420
22	阀瓣螺母 Disc nut	410	410	410	410	304(L)	316(L)	410
23	密封圈垫片 Seal gasket	420	420	304	304	304(L)	316(L)	316(L)
24	自密封圈 P.S. ring	304	304	304	304	304	316	304
25	自密封座 P.S. seat	420	420	304	304	304(L)	316(L)	F91
26	螺母垫片 Nut pad	410	410	410	410	410	410	410
27	拉紧螺母 Draw-in stud	碳钢 Cast steel	碳钢 Cast steel	碳钢 Cast steel	碳钢 Cast steel	碳钢 Cast steel	碳钢 Cast steel	碳钢 Cast steel

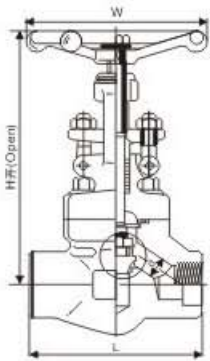


针型截止阀
阀瓣示意图
Needle type

螺栓连接阀盖，缩径和全径，明杆
支架(OS&Y)
Bolted bonnet, full port reducing
port outside screw and yoke(OS&Y)
末端连接可螺纹或承插焊，设计
按BS5352
Threaded, butt-welded or socket
welded ends; desing to Bs5352

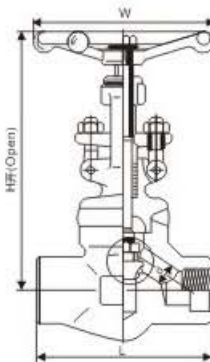


针型截止阀
阀瓣示意图
Needle type

焊接连接阀盖，缩径和全径，明杆支架
(OS&Y)
Welded bonnet, full port reducing
port outside screw and yoke(OS&Y)
末端连接可螺纹或承插焊，设计
按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352

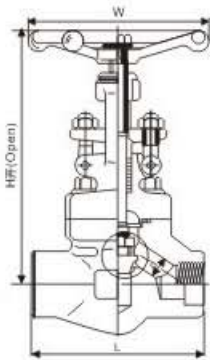

针型截止阀
阀瓣示意图
Needle type

螺栓连接阀盖，缩径和全径，明杆
支架(OS&Y)
Bolted bonnet, full port reducing
port outside screw and yoke(OS&Y)
末端连接可螺纹或承插焊，设计
按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352

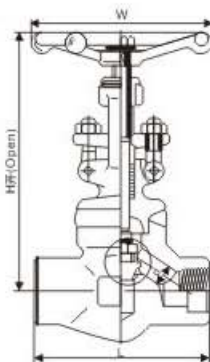

针型截止阀
阀瓣示意图
Needle type

焊接连接阀盖，缩径和全径，明杆支架
(OS&Y)
Welded bonnet, full port reducing
port outside screw and yoke(OS&Y)
末端连接可螺纹或承插焊，设计
按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352

CL800

规格(NPS) Specification	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	79	79	92	111	120	120	172	220	-
手轮直径(mm) Handwheel diameter	W	100	100	100	125	160	160	180	200	-
中心高度(开) (mm)Height	H	164	164	164	203	224	260	300	355	-
流道孔径(mm) Flow port dimension	d	7	9	13	17.5	23	30	35	46	-
重量(Kg)Weight		1.9	2.28	2.37	4.3	5.75	7.8	12.5	17.5	-

CL800


规格(NPS) Specification	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	79	79	92	111	120	152	172	220	-
手轮直径(mm) Handwheel diameter	W	100	100	100	125	160	160	180	200	-
中心高度(开) (mm)Height	H	164	164	164	203	224	260	300	355	-
流道孔径(mm) Flow port dimension	d	7	9	13	17.5	23	30	35	46	-
重量(Kg)Weight		1.7	1.7	1.9	3.3	5.2	6.8	10.6	13.8	-

CL900-1500

规格(NPS) Specification	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	92	111	111	120	152	172	220	230	-
手轮直径(mm) Handwheel diameter	W	100	125	125	160	160	180	200	240	-
中心高度(开) (mm)Height	H	171	207	207	240	258	330	355	370	-
流道孔径(mm) Flow port dimension	d	7	15	15	20	28	32	40	45	-
重量(Kg)Weight		2.3	3.7	3.7	6.8	7.6	11.6	15	21.9	-

CL900-1500


规格(NPS) Specification	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	92	111	111	120	152	172	220	230	-
手轮直径(mm) Handwheel diameter	W	100	125	125	160	160	180	200	240	-
中心高度(开) (mm)Height	H	171	207	207	240	258	330	355	370	-
流道孔径(mm) Flow port dimension	d	7	15	15	20	28	32	40	45	-
重量(Kg)Weight		2.2	3.4	3.4	5.6	6.0	10.3	14.2	18.0	-

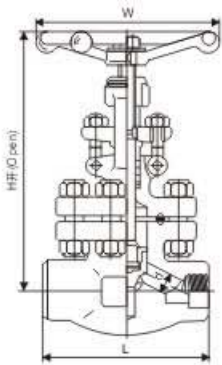

螺栓连接阀盖(RJ), 全径, 明杆支架
(OS&Y) Bolted bonnet, full port
outside screw and yoke(OS&Y)
末端连接为螺纹或承插焊, 设计
按BS5352 Threaded, butt-welded
or socket welded ends; desing to BS5352

CL900-1500


规格(NPS)Specification	F.P	1/2	3/4	1	1' /4	1' /2	2	2' /2
结构长度(mm) Face to face	L	111	111	152	-	172	220	235
手轮直径(mm) Handwheel diameter	W	110	110	130	-	180	210	250
中心高度(开) (mm)Height	H	227	227	300	-	307	400	448
流道孔径(mm) Flow port dimension	d	9	12	15	-	20	32	40
重量(Kg)Weight		5	5	10	-	11.5	22	37

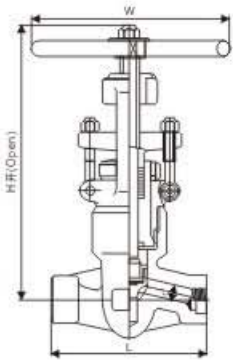

压力自紧式连接阀盖, 全径, 明杆支架
(OS&Y)
Pressure seal bonnet, full port outside
screw and yoke(OS&Y)
末端连接为螺纹或承插焊, 设计
按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352

CL900-1500

规格(NPS)Specification	F.P	1/2	3/4	1	1' /4	1' /2	2	2' /2
结构长度(mm) Face to face	L	140	140	140	178	178	216	-
手轮直径(mm) Handwheel diameter	W	200	200	200	280	280	300	-
中心高度(开) (mm)Height	H	320	320	320	440	440	490	-
流道孔径(mm) Flow port dimension	d	12	15	20	28	32	40	-
重量(Kg)Weight		10.8	10.5	11.5	19.6	21.1	55.4	-




焊接阀盖

螺栓连接阀盖(RJ), 全径, 明杆
支架(OS&Y)
Bolted bonnet, full port outside
screw and yoke(OS&Y)
末端连接为承插焊, 设计
按ASME B16.34
Threaded, welded ends;
desing conform to ASME B16.34

CL2500


规格(NPS)Specification	F.P	1/2	3/4	1	1' /4	1' /2	2	2' /2
结构长度(mm) Face to face	L	150	150	210	-	235	235	-
手轮直径(mm) Handwheel diameter	W	130	130	250	-	300	300	-
中心高度(开) (mm)Height	H	293	300	390	-	435	435	-
流道孔径(mm) Flow port dimension	d	11	14	19	-	28	35	-
重量(Kg)Weight		10	10.3	22.4	-	37.5	38	-

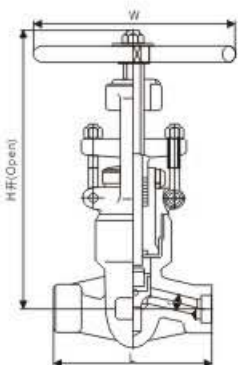

压力自紧式连接阀盖, 全径, 明杆支架
(OS&Y)
Pressure seal bonnet, full port outside
screw and yoke(OS&Y)
末端连接为承插焊, 设计
按ASME B16.34
Threaded, welded ends; desing
conform to ASME B16.34

CL2500

规格(NPS)Specification	F.P	1/2	3/4	1	1' /4	1' /2	2	2' /2
结构长度(mm) Face to face	L	186	186	186	232	232	279	-
手轮直径(mm) Handwheel diameter	W	200	200	200	280	280	300	-
中心高度(开) (mm)Height	H	375	378	380	490	490	540	-
流道孔径(mm) Flow port dimension	d	11	14	19	25	28	35	-
重量(Kg)Weight		10.8	11.6	12.3	26.0	28.4	60	-

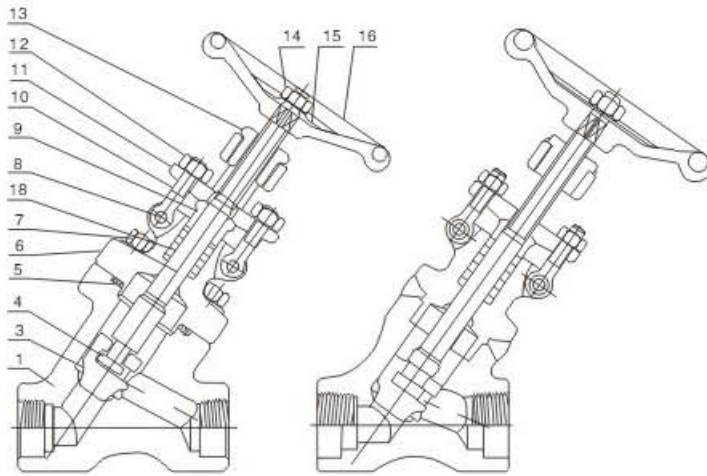

碳钢温压等级 Carbon steel temperature-pressure rate


CL150-285 P.S.I @ 100°F CL300-740 P.S.I @ 100°F
 CL 600-1480 P.S.I @ 100°F CL 800-1975 P.S.I @ 100°F
 CL 1500-3705 P.S.I @ 100°F

应用规范 Application standards


1. 设计制造 Design and manufacture conform to: BS5352 MSS SP-118;
2. 连接端尺寸 Connection ends conform to:
 - 1) 承插口尺寸按 Socket welded dimension conform to ANSI B16.11, JB/T1751
 - 2) 螺纹端尺寸按 Screw ends dimension conform to ANSI B1.20.1, JB/T7306
 - 3) 对焊端尺寸按 Butt-welded conform to ANSI B16.25, JB/T12224
 - 4) 法兰端尺寸按 Flanged ends conform to ANSI B16.5, JB79
3. 阀门检查和试验 Test and inspection conform to: API 598, GB/T13927, JB/T9092
4. 结构特征 Structure features:
 - 螺栓连接阀盖(B.B)和明杆支架(OS&Y)
Bolted bonnet, outside screw and yoke
 - 或焊接阀盖(W.B)和明杆支架(OS&Y)
Welded bonnet, outside screw and yoke
5. 材料按 Materials conform to ANSI/ASTM的规定。
6. 主体材料 Main materials:
 - A105; LF2; F5; F11; F22; 304(L); 316(L);
 - F347; F321; F51; Monel; 20合金等 Alloy.
 - 哈氏合金等 Hastelloy.

典型零件材料表 Main part materials list


序号 NO.	零件名称 Part name	A105/F6a	A105/F6aHFS	LF2/304	F11/F6aHF	F304(L)/304(L)	F316(L)/316(L)	F51/F51
1	阀体 Body	A105	A105+HF	LF2	F11+HF	F304(L)	F316(L)	F51
3	阀瓣 Disc	F6a	F6a	F304	F6aHF	F304(L)	316(L)	F51
4	阀杆 Stem	410	410	304	410	304(L)	F316(L)	F51
5	垫片 Gasket	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	304+柔性石墨 Flexible graphite	316+柔性石墨 Flexible graphite	316+柔性石墨 Flexible graphite
6	阀盖 Bonnet	A105	A105	LF2	F11	F304(L)	F316(L)	F51
7	螺栓 Bolt	B7	B7	L7	B16	B8(M)	B8(M)	B8M
8	销 Pin	410	410	410	410	304	304	304
9	填料压套 Gland	410	410	304	410	304	316	F51
10	活节螺栓 Gland eyebolt	B7	B7	L7	B16	B8(M)	B8(M)	B8M
11	填料压板 Gland flange	A105	A105	LF2	F11	F304	F304	F304
12	六角螺母 Hex nut	2H	2H	2H	2H	8(M)	8(M)	8M
13	阀杆螺母 Stem nut	410	410	410	410	410	410	410
14	锁紧螺母 Locking nut	35	35	35	35	35	35	35
15	铭牌 Nameplate	AL	AL	AL	AL	AL	AL	AL
16	手轮 Handwheel	A197	A197	A197	A197	A197	A197	A197
18	填料 Packing	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite	石墨 Graphite

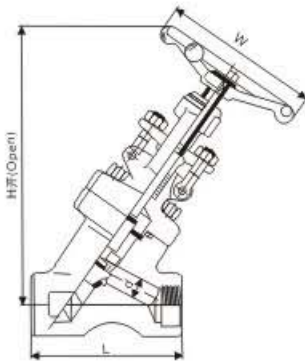


螺栓连接阀盖，缩径和全径，
明杆支架(OS&Y)
Bolted bonnet, full port
reducing port outside
screw and yoke(OS&Y)
末端连接为螺纹或承插焊，
设计按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352



焊接连接阀盖，缩径和全径，
明杆支架(OS&Y)
Welded bonnet, full port
reducing port outside screw
and yoke(OS&Y)
末端连接为螺纹或承插焊，
设计按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352

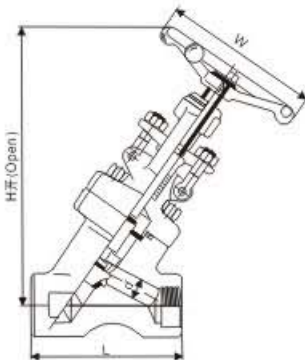

螺栓连接阀盖，全径，明杆
支架(OS&Y)
Bolted bonnet, full port
outside screw and yoke(OS&Y)
末端连接为螺纹或承插焊，
设计按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352



焊接连接阀盖，全径，明杆支
架(OS&Y)
Welded bonnet, full port
outside screw and yoke(OS&Y)
末端连接为螺纹或承插焊，
设计按BS5352
Threaded, butt-welded or socket
welded ends; desing to BS5352

CL800

规格(NPS) Specification	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	98	98	98	120	140	140	170	200	-
手轮直径(mm) Handwheel diameter	W	100	100	100	125	160	160	180	200	-
中心高度(开) (mm)Height	H	180	180	180	188	280	280	295	350	-
流道孔径(mm) Flowport dimension	d	7	9	13	17.5	23	30	35	46	-
重量(Kg)Weight		2.6	2.6	3.8	4.6	9.3	9.3	14	19.6	-

CL800


规格(NPS) Specification	R.P	-	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	F.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	98	98	98	120	140	140	170	200	-
手轮直径(mm) Handwheel diameter	W	100	100	100	125	160	160	180	200	-
中心高度(开) (mm)Height	H	198	198	198	207	280	280	295	350	-
流道孔径(mm) Flowport dimension	d	7	9	13	17.5	23	30	35	46	-
重量(Kg)Weight		1.8	1.8	2.0	3.5	8.0	8.0	12	16	-

CL900-1500

规格(NPS) Specification	F.P	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	98	120	120	140	140	170	200	-
手轮直径(mm) Handwheel diameter	W	100	125	125	160	160	180	200	-
中心高度(开) (mm)Height	H	175	175	215	215	254	305	350	-
流道孔径(mm) Flowport dimension	d	9	12	15	20	28	32	40	-
重量(Kg)Weight		2.6	4.6	4.6	9.3	9.3	14	19.6	-

CL900-1500


规格(NPS)Specification	F.P	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
结构长度(mm) Face to face	L	98	120	120	140	140	170	200	-
手轮直径(mm) Handwheel diameter	W	100	125	125	160	160	180	200	-
中心高度(开) (mm)Height	H	175	207	207	280	280	295	350	-
流道孔径(mm) Flowport dimension	d	9	12	15	20	28	32	40	-
重量(Kg)Weight		1.8	3.5	3.5	8.0	8.0	12	16	-



焊接连接阀盖, 全径, 明杆
 支架(OS&Y)
 Welded bonnet, full port
 outside screw and yoke(OS&Y)
 末端连接为焊接承插连接,
 设计按ASME 16.34
 Socket welded, design
 conform to ASME 16.34

CL2500


规格 (NPS) Specification	F.P	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	L	186	186	186	186	232	232	310
手轮直径(mm) Handwheel diameter	W	200	200	200	200	280	280	300
中心高度(开) (mm) Height	H	329	329	329	329	350	350	383
流道孔径(mm) Flow port dimension	d	9	11	14	19	25	28	35
重量(Kg) Weight		10.8	11.6	12.3	12.3	28.0	26.4	43.8



压力自紧式连接阀盖, 全径,
 明杆支架(OS&Y)
 Pressure seal bonnet, full
 port outside screw and yoke(OS&Y)
 末端连接为焊接承插连接,
 设计按ASME 16.34
 Socket welded, desing
 conform to ASME 16.34

CL2500


规格 (NPS) Specification	F.P	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	L	186	186	186	186	232	232	310
手轮直径(mm) Handwheel diameter	W	200	200	200	200	280	280	300
中心高度(开) (mm) Height	H	333	333	333	333	406	406	524
流道孔径(mm) Flow port dimension	d	9	11	14	19	25	28	35
重量(Kg) Weight		10.8	11.6	12.3	12.3	28.0	26.4	43.8



焊接自紧式密封阀盖, 全径,
 明杆支架(OS&Y)
 Welded seal bonnet, full port
 outside screw and yoke(OS&Y)
 末端连接为焊接承插连接,
 设计按ASME 16.34
 Socket welded, desing
 conform to ASME 16.34

CL4500





规格 (NPS) Specification	F.P	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	L	155	155	155	155	-	225	330
手轮直径(mm) Handwheel diameter	W	220	220	220	220	-	300	320
中心高度(开) (mm) Height	H	350	350	350	380	-	453	453
流道孔径(mm) Flow port dimension	d	9	11	11	15	-	26	28
重量(Kg) Weight		9.4	9.6	9.6	10.5	-	34	36



压力自紧式密封阀盖, 全径,
 明杆支架(OS&Y)
 Pressure seal bonnet, full port
 outside screw and yoke(OS&Y)
 末端连接为焊接承插连接,
 设计按ASME 16.34
 Socket welded, desing
 conform to ASME 16.34

CL4500

规格 (NPS) Specification	F.P	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	L	200	200	200	200	250	250	230
手轮直径(mm) Handwheel diameter	W	280	280	280	280	300	300	320
中心高度(开) (mm) Height	H	400	400	400	400	460	460	540
流道孔径(mm) Flow port dimension	d	9	11	11	15	20	26	28
重量(Kg) Weight		30	30	30	30	30	36	58

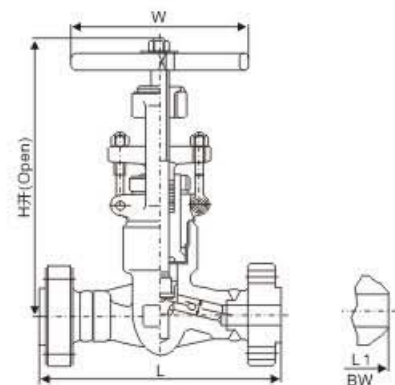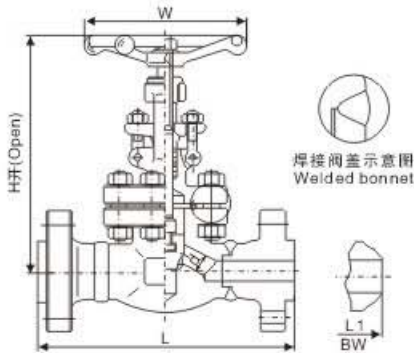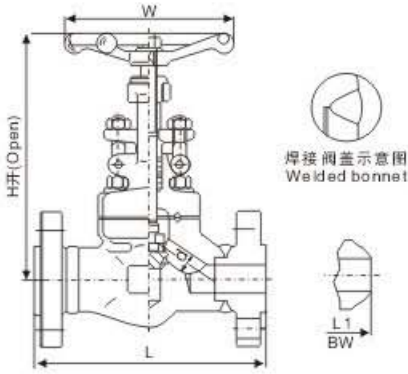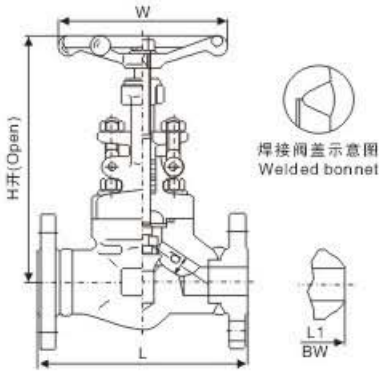

CL150-300-600

缩径连接阀盖, 缩径, 明杆支架(OS&Y) Bolted bonnet full port reducing port outside screw and yoke(OS&Y)
末端连接为连接法兰或对焊连接, 设计按BSS352 Flange or butt-welded design to BSS352

规格(NPS)Specification		R.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	CL150	L(RF) L1(BW)	-	-	108	117	127	140	165	203
	CL300		-	-	152	178	203	216	229	267
	CL600		-	-	165	190	216	229	241	292
手轮直径(mm)Handwheel diameter		W	-	-	100	100	125	160	160	180
中心高度(开)(mm) Height	CL150,CL300	H	-	-	180	184	217	224	260	300
	CL600		-	-	164	164	203	224	260	300
流道孔径(mm)Flow port dimension		d	-	-	9	13	17.5	23	30	35
重量(kg) Weight	CL150	RF	-	-	3.45	4.00	6.19	9.6	10.5	17
		BW	-	-	2.3	3.6	7.8	8.2	12.0	15.0
	CL300	RF	-	-	3.8	5.1	7.2	12	13.5	19.7
		BW	-	-	2.8	4.0	8.5	9.2	12.6	16.8
	CL600	RF	-	-	5.6	7.8	12.5	17	23.5	38.8
		BW	-	-	3.4	4.7	9.2	10.5	13.3	18.9

注: 如需法兰和阀体一体式锻造的请与销售人员联系。
Flange Integrity Forged Steel Valve enquiry please contact sales department

CL900-1500

缩径连接阀盖(RJ), 缩径, 明杆支架(OS&Y) Bolted bonnet full port reducing port outside screw and yoke(OS&Y)
末端连接为连接法兰或对焊连接, 设计按BSS352 Flange or butt-welded design to BSS352

规格(NPS)Specification		E.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	L(RF),L1(BW)	-	-	216	229	254	279	305	368	
	L(RTJ)	-	-	216	229	254	279	305	371	
手轮直径(mm) Handwheel diameter	W	-	-	125	125	160	160	180	200	
中心高度(开) (mm)Height	H	-	-	207	207	230	160	300	355	
流道孔径(mm) Flow port dimension	d	-	-	12	15	20	28	32	40	
重量(kg)Weight		-	-	11	13.2	17.4	19	24.5	31	

CL2500


缩径连接阀盖(RJ), 缩径, 明杆支架(OS&Y) Bolted bonnet full port reducing port outside screw and yoke(OS&Y)
末端连接为连接法兰或对焊连接, 设计按ASME B16.34 Flange or butt-welded design conform to ASME B16.34

规格(NPS)Specification		E.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	L(RF),L1(BW)	-	-	264	273	308	-	384	451	
	L(RTJ)	-	-	264	273	308	-	387	454	
手轮直径(mm) Handwheel diameter	W	-	-	125	160	200	-	250	240	
中心高度(开) (mm)Height	H	-	-	207	240	258	-	355	300	
流道孔径(mm) Flow port dimension	d	-	-	11	14	19	-	28	35	
重量(kg)Weight		-	-	19.5	21.5	42	-	65	95	

CL2500


压力自紧式密封阀盖, 全径, 明杆支架(OS&Y) Pressure seal bonnet full port outside screw and yoke(OS&Y)
末端连接为焊接法兰或对焊连接, 设计按ASME B16.34 Welding flange or butt-welded design conform to ASME B16.34

规格(NPS)Specification		E.P	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
结构长度(mm) Face to face	L(RF),L1(BW)	-	-	264	273	308	349	384	451	
	L(RTJ)	-	-	264	273	308	349	387	454	
手轮直径(mm) Handwheel diameter	W	-	-	200	200	280	280	280	300	
中心高度(开) (mm)Height	H	-	-	320	320	320	440	440	490	
流道孔径(mm) Flow port dimension	d	-	-	11	14	19	25	28	35	
重量(kg)Weight		-	-	21.5	24.7	30.4	48.1	58.1	130	

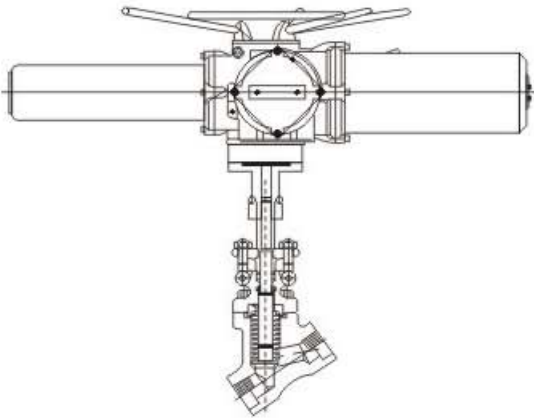


电动装置 Electric actuator

CLASS	材料 Material
150~2500	碳钢厂 Carbon steel 不锈钢 Stainless steel

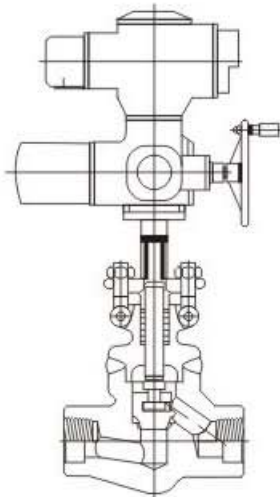

电动装置 Electric actuator

CLASS	材料 Material
150~2500	碳钢厂 Carbon steel 不锈钢 Stainless steel

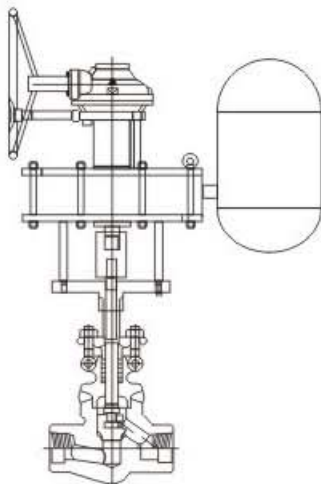

气动装置 Pneumatic actuator

CLASS	材料 Material
150~2500	碳钢厂 Carbon steel 不锈钢 Stainless steel